


Connector: JST B6P-VH

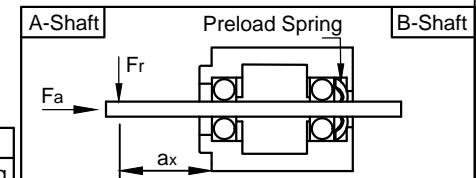

TYPE OF CONNECTION		
Bipolar	Pin No.	Winding
A	1	[Symbol]
A\	3	
B	4	[Symbol]
B\	6	

Max. Axial Force F_a	N	15
Max. Radial Force F_r ($a_2 = 20$ mm)	N	75
Axial Play $F_a = 4.0$ N	mm	0.08
Radial Play $F_r = 4.0$ N	mm	0.02

MOTOR SPECIFICATION		
Voltage	V DC	2.1
Current per Winding	A	2.8
Resistance per Phase (25°C)	$\pm 15\%$ Ω	0.78
Inductance per Phase (1 kHz)	$\pm 20\%$ mH	1.8
Holding Torque	Nm	0.6
Step Angle	$\pm 5\%$ °	1.8
Rotor Inertia	kg m ²	12 x 10 ⁻⁶

GENERAL MOTOR SPECIFICATION		
Ambient Temperature	°C	-20 ... 50
Max. Temperature Rise (at standstill - 2 phases energized)	°C	80
Max. Ambient Humidity (non condensing)	%	85
Insulation Class		B
Insulation Resistance	M Ω	100
Dielectric Strength (for 1 min - coil to case)	V AC	500

ISO 8015	ISO 1302	ISO 2768 cK	ISO 13715	Weight: 0.45 kg
		Date	Name	SCA5618X2804-A
		Drawn	Schneid_A	
		Checked	Hofstet_M	
		Approved	Reith_S	
01	change dimension conn.	Schneid_A	16.10.2019	01200262
REV	Rev. Text	Name	Rel. Date	State: Released
				Rev: 01
				P

